
Service Manual

Service Parts & Diagrams

HD-9XW

BendPak SKU 5260518 HD-9XW Four-Post Car Lift Version L 06/06/2016

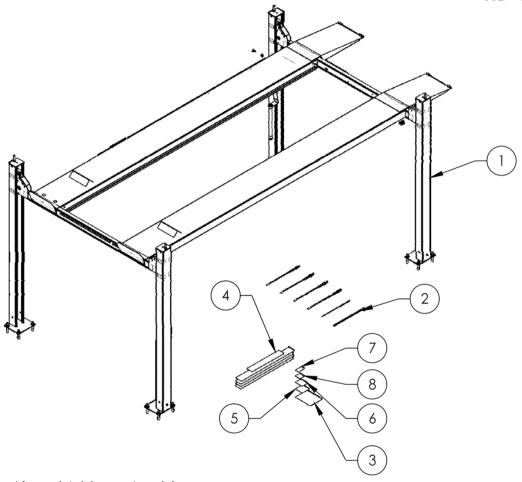

This guide is a troubleshooting reference used for maintaining and servicing your BendPak product. It provides comprehensive information on identifying serviceable parts and components and assists in troubleshooting problems and performing assembly/disassembly procedures.



BendPak, Inc. Corporate Office

1645 Lemonwood Drive Santa Paula, CA 93060 USA Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 info@bendpak.com

Customer Service Desk / Warranty

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 customerservice@bendpak.com

Parts Orders

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 parts@bendpak.com

Domestic Sales & Service


USA Sales Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 sales@bendpak.com

International Sales & Service

Office Tel: 1-805-933-9970 Exports Department: 1-805-933-9970 Ext. 192 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160

bpkexports@bendpak.com

REVISION										
REV	DESCRIPTION	DATE	EDITED BY	ECO#						
С	ADDED 5905103, 5905200, 5905402, 5905465, 5905940, AND 5930605, UPDATED BOM REVISIONS	08/13/2015	TM	00683						
D	REMOVED 5930605, ADDED 5905952 UPDATED BOM REVISIONS	11/25/2015	JM	00740						
Е	REPLACED 5905952 WITH 5905953, UPDATED BOM REVISIONS	12/30/2015	JM	00741						

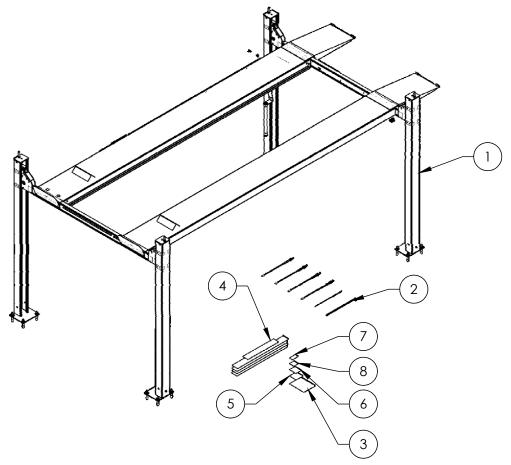

ITEM NO.	PART NU	JMBER		DESC	CRIPTION		QTY.	REV
1	52453		HD-		SUPERSTRU		1	Е
2	5250	168		PARTS B	OX HD-9XV	V	1	Е
3	5905	103		WARNIN	G ALI/WL 2	00	1	
4	59052				CAL KIT, LES		1	В
5	59054	465		MANUFA	CTURER LAI	BEL	1	
6	59054	402		MAX C	AP DANGE	R	1	
7	59059	940		PRODUC	t data lae	3EL	1	
8	59059	953	SERIAL	NUMBER	INTERIOR T.	AG PLATE	1	-
11.03.1011.0.0	DDAMING		1111	D 4.TE				

DO NOT SCALE DRAWING NAME DATE

DRAWN TM 08/12/2014

CHECKED - THIRD ANGLE PROJECTION



BendPak, 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

) |


HD-9XW PRODUCTION LIFT VER L (CE CERT)


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDPAK INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS

SIZE DWG, NO. REV 5260518 E SCALE: 1:50 SHEET 1 OF 2


NOTE: UNLESS OTHERWISE SPECIFIED.

- SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING
 ALL LABELS TO BE APPLIED TO POSTS AFTER PAINTING.
- 3. SEE ATTACHED LABEL PLACEMENT SHEET

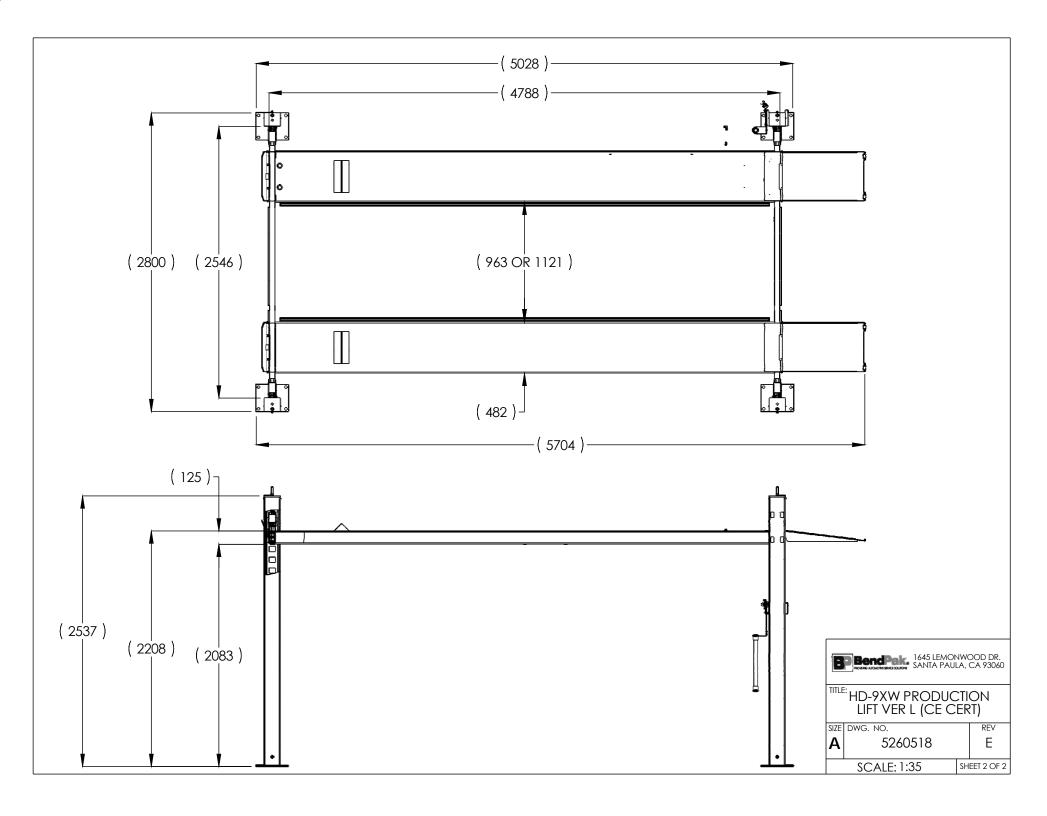

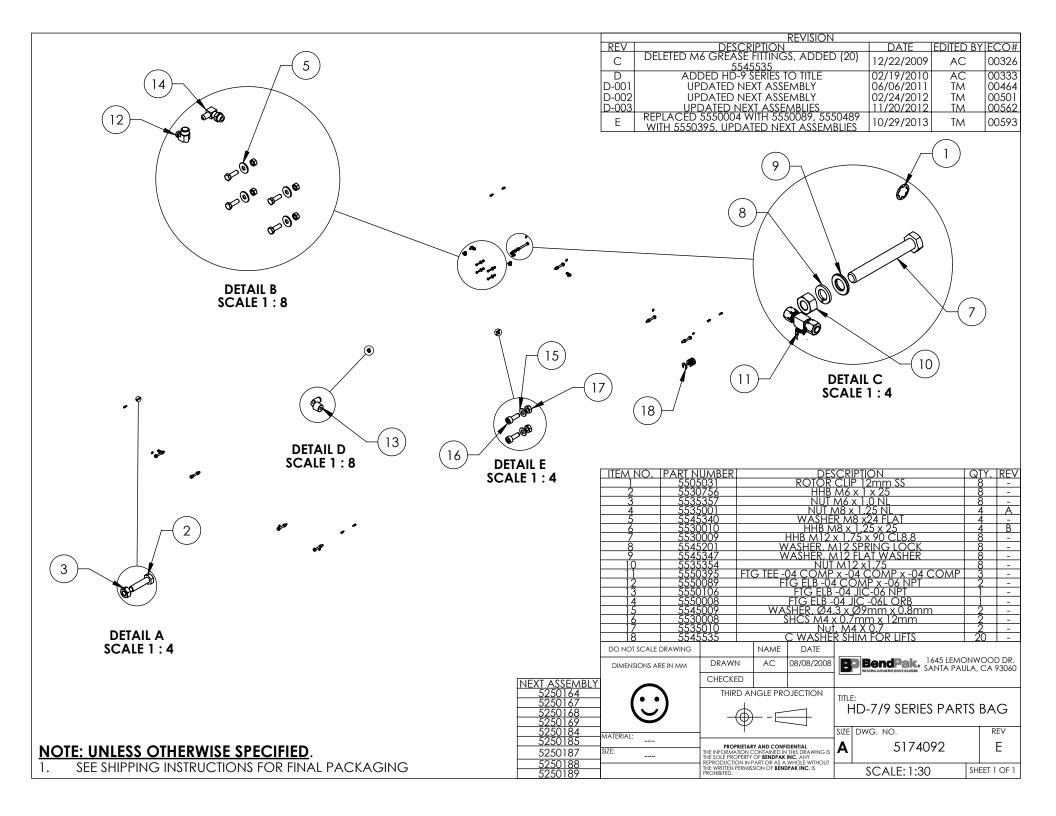

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
D	UPDATED NEXT ASSEMBLY, ADDED 5550486	02/24/2010	AC	00333
D-001	UPDATED NEXT ASSEMBLY	01/21/2011	TM	00439
D-010	UPDATED NEXT ASSEMBLIES	07/24/2013	TM	00611
Е	REPLACED 5550481 WITH 5550087	10/29/2013	TM	00593
F	REPLACED 5590240 WITH 5590175, UPDATED NEXT ASSEMBLIES	05/05/2015	MR	00683

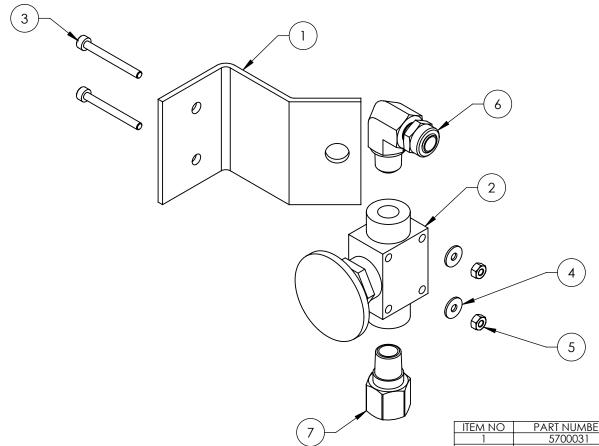

L IIEM NO	PAR	I NUMBER			l	DESCRIPTION		QIY	REV
1	5	700031			ZERO AI	NGLE MTG BRA	CKET	1	С
2	5	590175		PUSH BUTTON AIR VALVE				1	В
3	5	530043			SHO	CS M3 x 0.5 x 30	1	2	-
4	5545024			WASHER M3 x 9mm				2	-
5	5	535020		NUT M3 x 0.5 NL				2	-
6	5	550087		FTG ELB -04 COMP x -02 NPT			2 NPT	1	-
7 5550486				FTG NP	L -02 NPT x -04 F	NPT	1	-	
DO NOT SCALE I	DRAWING		NAM	۱E	DATE				

DRAWN AC 3/14/2008 CHECKED CA 09/02/2015 THIRD ANGLE PROJECTION TITLE.

	IIILE.
_	PUSH BI
	CUTE DAVIG A

SUTTON AIR ASSEMBLY SIZE DWG. NO. REV

F

SHEET 1 OF 1

BP BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDRAL MIC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDRAK INC. IS
PROHIBITED. 5215096 SCALE: 2:3

DIMENSIONS ARE IN MM





NEXT ASSEMBLY
HD/HDS/HDSO
SERIES
5250118
5250249
5250344

NOTE: UNLESS OTHERWISE SPECIFIED. 1. ASSEMBLE ITEMS AS SHOWN

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
В	UPDATED BOM REVISIONS, UPDATED NEXT ASSEMBLY	11/14/2008	AC	00174
С	UPDATED BOM REVISION	04/22/2010	TM	00351
D		06/10/2010	AC	00366
D-001	UPDATED BOM REVISIONS UPDATED NEXT ASSEMBLY	01/20/2011	TM	00439
D-002	UPDATED NEXT ASSEMBLY	06/06/2011	TM	00464



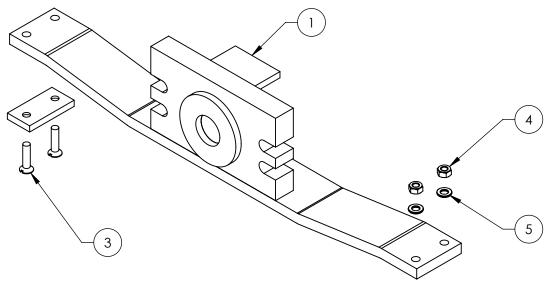



ITE	M NO	PART NUMBER			REV
	1	5600901	HD-7500/9 SERIES CYLINDER FLANGE ARM WELDMENT	1	D
	2	5715090	CYL. FLANGE ARM SLIDE	2	Α
	3	5530069	FHS M6 x 1.0 x 25	4	-
	4	5535357	NUT M6 x 1.0 NL	4	-
	5	5545005	M6 FLAT WASHER	4	-

DO NOT SCALE DRAWING NAME DATE DRAWN 08/21/2008 DIMENSIONS ARE IN MM CHECKED MT 07/06/201 THIRD ANGLE PROJECTION MATERIAL:

SIZE DWG. NO. PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BADPAK INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED.


HD-7500/9 CYLINDER FLANGE ARM ASSEMBLY 5215129 D


BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060


SHEET 1 OF 1 SCALE: 1:3

NOTE: UNLESS OTHERWISE SPECIFIED.


ASSEMBLE ITEMS AS SHOWN

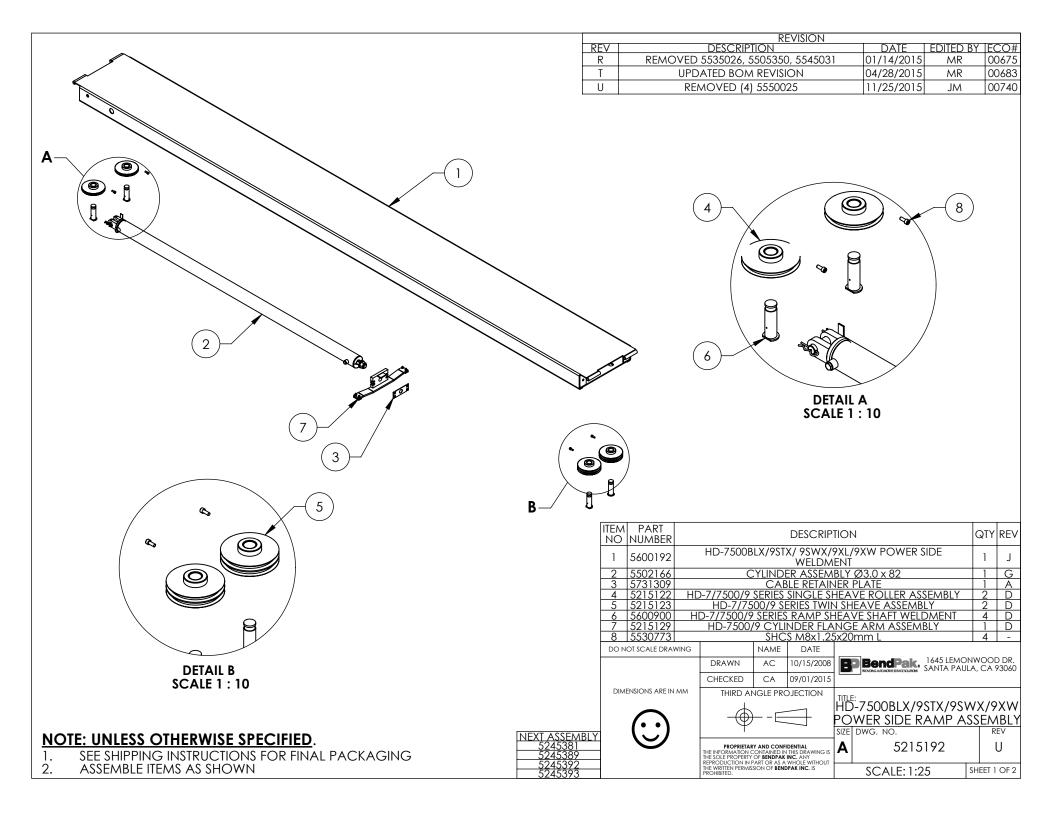

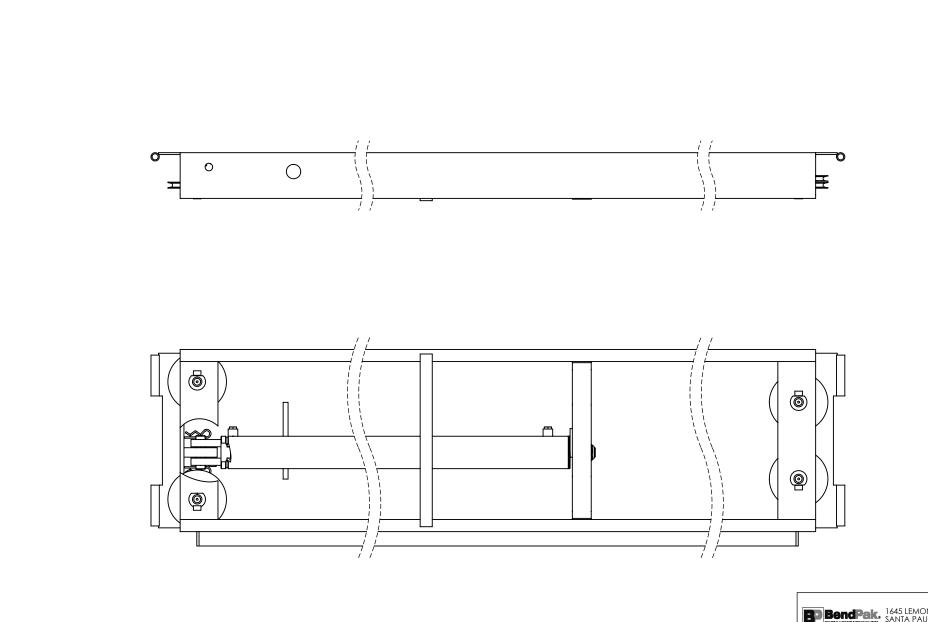



	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
С	UPDATED TITLE TO REFLECT WHERE USED UPDATED NEXT ASSEMBLY	02/25/2010	AC	00333
D	UPDATED TITLE TO REFLECT WHERE USED UPDATED BOM REVISIONS	06/10/2010	AC	00366
D-001 D-002	REPLACED 5535112 WITH 5535357 UPDATED NEXT ASSEMBLY UPDATED NEXT ASSEMBLIES	06/06/2011	TM TM	00464 00487
E E-001 E-002	UPDATED BOM REVISION UPDATED NEXT ASSEMBLIES UPDATED NEXT ASSEMBLIES	08/22/2012 11/19/2012 05/20/2013	TM TM TM	00541 00562 00593
E-002 E-003 E-004 E-005	UPDATED NEXT ASSEMBLY UPDATED NEXT ASSEMBLIES UPDATED NEXT ASSEMBLIES	11/20/2013 06/10/2014 08/14/2014	TM	00626 00648 00664

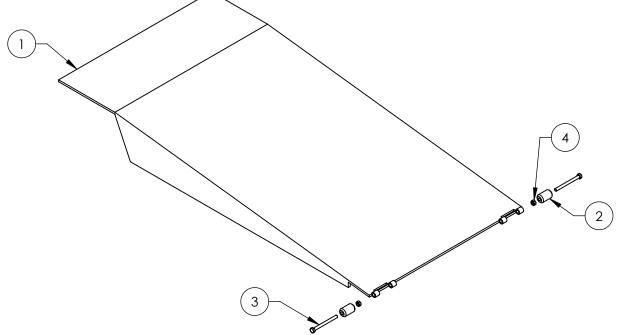


ITEM	PART	DESCRIPTION	QTY	RFV
NO	NUMBER		α	11.
1	5600891	HD-7500BL/7500BLX/ 9/9N/9NX/9ST/9STX/9XW DRIVE UP RAMP WELDMENT	1	D
2	5716149	HD-7500/9, HD/S-14 SERIES DRIVE UP RAMP PLASTIC ROLLER	2	F
3	5530005	HHB M6 x 1 x 70	2	-
4	5535357	NUT M6 x 1.0 NL	2	-

	4 553535/		1	<u>101 M6 x</u>	<u>1.0 I</u>	NL		<u> 2 -</u>	
NEVT ACCELABLY	DO NOT SCALE DRAWING		NAME	DATE					
NEXT ASSEMBLY 5245275		DRAWN	AC	11/13/2008	В	BendPak. 1645 LEMC	NW ILA,	OOD D CA 930	R. 60
5245381 5245382	DIMENSIONS ARE IN MM	CHECKED							
5245383 5245384	_	THIRD AN	NGLE PRO	DJECTION	ŢĬŢĻĒ	:. 5 750001 (DLV 0.05	/CT		
5245385 5245386	\bigcirc	 	∈	\Rightarrow	L D	: D-7500BL/BLX, 9/ST DRIVE UP RAMP AS	/51 SF <i>N</i>	X/X\ MBLY	/V /
5245388 5245388		Ψ		7		DWG. NO.	Ť	REV	_
5245392 5245393	•	THE INFORMATION C	OF BENDPAK	THIS DRAWING IS INC. ANY	Α	5215193		F	
5245395 5245396		REPRODUCTION IN F THE WRITTEN PERMIS: PROHIBITED.				SCALE: 1:8	SHE	ET 1 OF	: 1

- NOTE: UNLESS OTHERWISE SPECIFIED.

 SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING ASSEMBLE ITEMS AS SHOWN

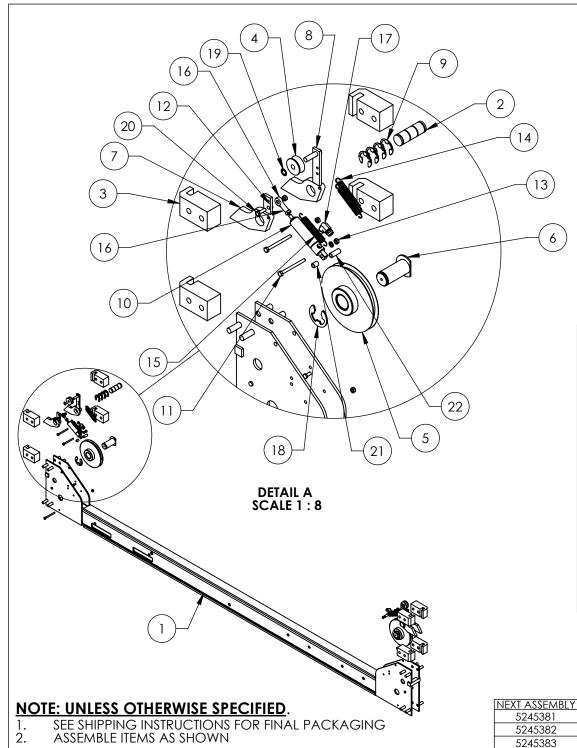

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
Е	REPLACED 5545026 WITH 5545005	03/19/2015	MR	00683
F	REMOVED (2) 5550025 AND (2) 5916630	11/25/2015	JM	00740
C	LIPDATED ROM REVISIONS	12/30/2015	M	00741

	ITEM NO	PART NUMBER				DESCRIP [*]	TION		QTY	REV
ı	1	5600714	Н	D-9/9XW C	ROSST	UBE WELD	MENT, SMALL W	INDOW	1	Е
Ī	2	5746008		HD/HD:	S-7/750	0/9/14, H	DSO-14 SAFETY F	PIN	2	Е
	3	5716005		HD-7/7500)/9/14/	HDSO-14	PLASTIC SLIDE BI	-OCK	8	J
[4	5575420		HD-	7/7500	/9 SERIES	SAFETY ROLLER		2	С
	5	5215122					HEAVE ROLLER A		2	D
	6	5600160	HD-7	7/7500/9 SE	RIES CI	ROSSTUBE	SHEAVE SHAFT \	WELDMENT	2	Е
	7	5600760		HD/HDS L	<u> JIGHT D</u>	OUTY SERIE	S SAFETY WELDA	ΛENT	2	В
	8	5600044	H	D/HDS LIGH	IT DUTY	SERIES SI	LACK SAFETY WE	LDMENT	2	F
	9	5540275		E RI	NG Ø2	25mm OD	DIN 6799 0250		8	-
	10	5502195		AIR	CYLINE	DER, Ø19r	nm x 25 STROKE		2	-
	11	5530005			H	НВ М6 х	1 x 70		6	-
	12	5545005			Ν	16 FLAT W	ASHER		4	-
	13	5535357			١	VDT M6 x	1.0 NL		8	-
	14	5540065		SPRING	G Ø13r	nm x 90m	nm, SLACK SAFET	Υ	4	Α
	15	5540070		SPRIN	G Ø13r	mm x 89n	nm, AIR CYLINDE	R	2	В
	16	5505625		F	<u>EMALE</u>	ROD END) M6 x 33mm		2	-
	17	5550087			FTG ELE	3 -04 CON	MP x -02 NPT		2	-
	18	5540010		E	RING	Ø32mm (OD DIN 6799		2	-
	19	5505030			ROT	OR CLIP	10mm SS		2	-
	20	5530093			H	HHB M6 x	1 x 20		2	-
	21	5755136		HD	AIR C	YLINDER S	SPACER 12mm		2	В
[22	5755137		HD	AIR C	YLINDER S	SPACER 25mm		2	В
	DO N	OT SCALE DRA	WING		NAME	DATE				


BP BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060 DRAWN 04/30/2013 TM CHECKED THIRD ANGLE PROJECTION


DIMENSIONS ARE IN MM


HD-9/9XL/XW CROSSTUBE ASSEMBLY, SMALL WINDOW


PROPRIETARY AND CONFIDENTIAL TRUPICIANT AND COMPIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDPAK INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED. 5215621 G

SCALE: 1:20 SHEET 1 OF 1

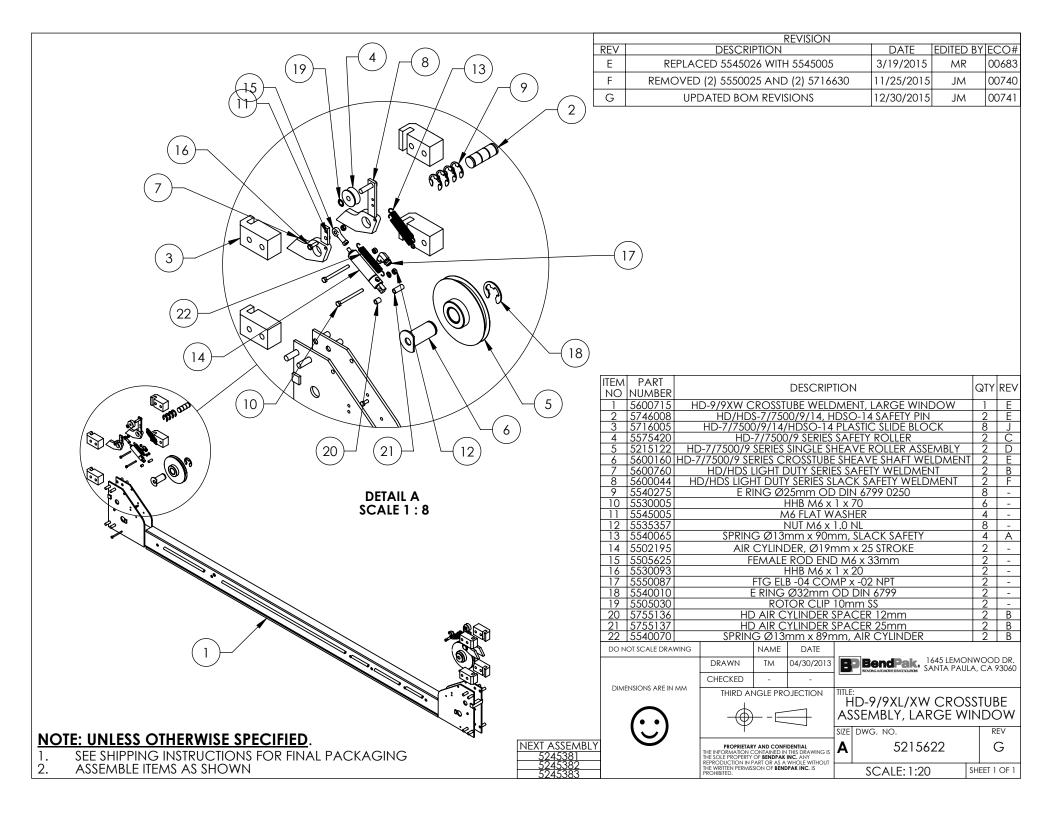


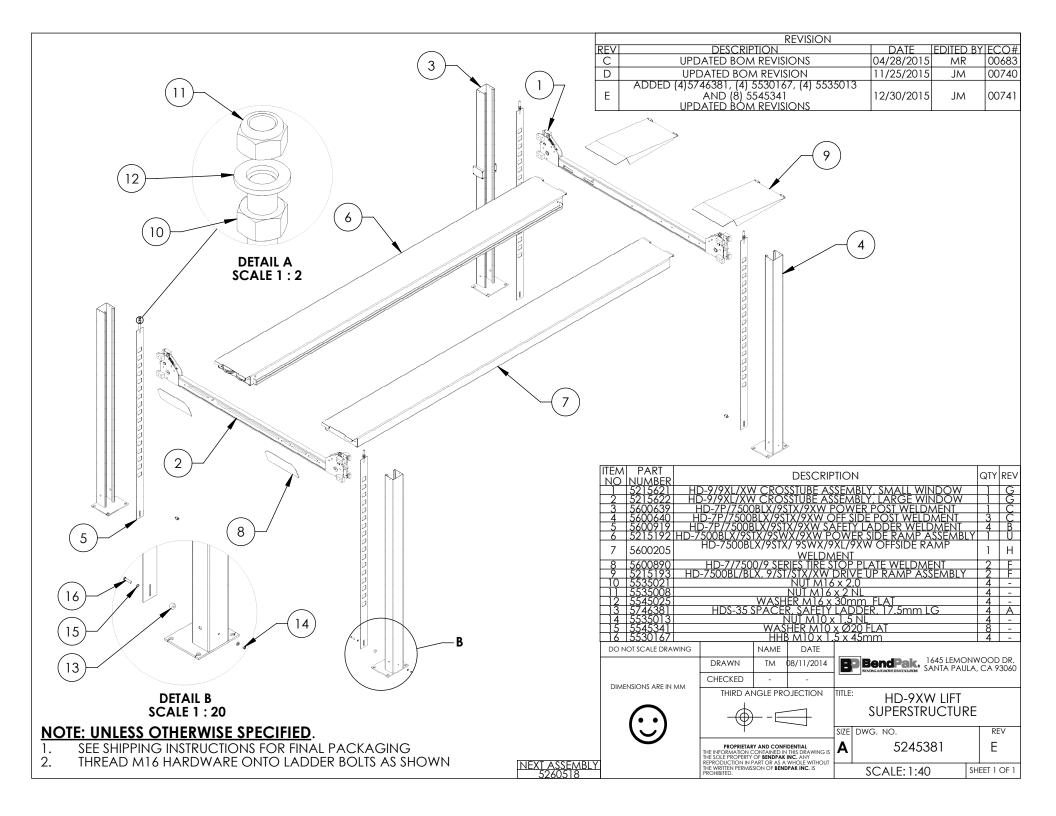

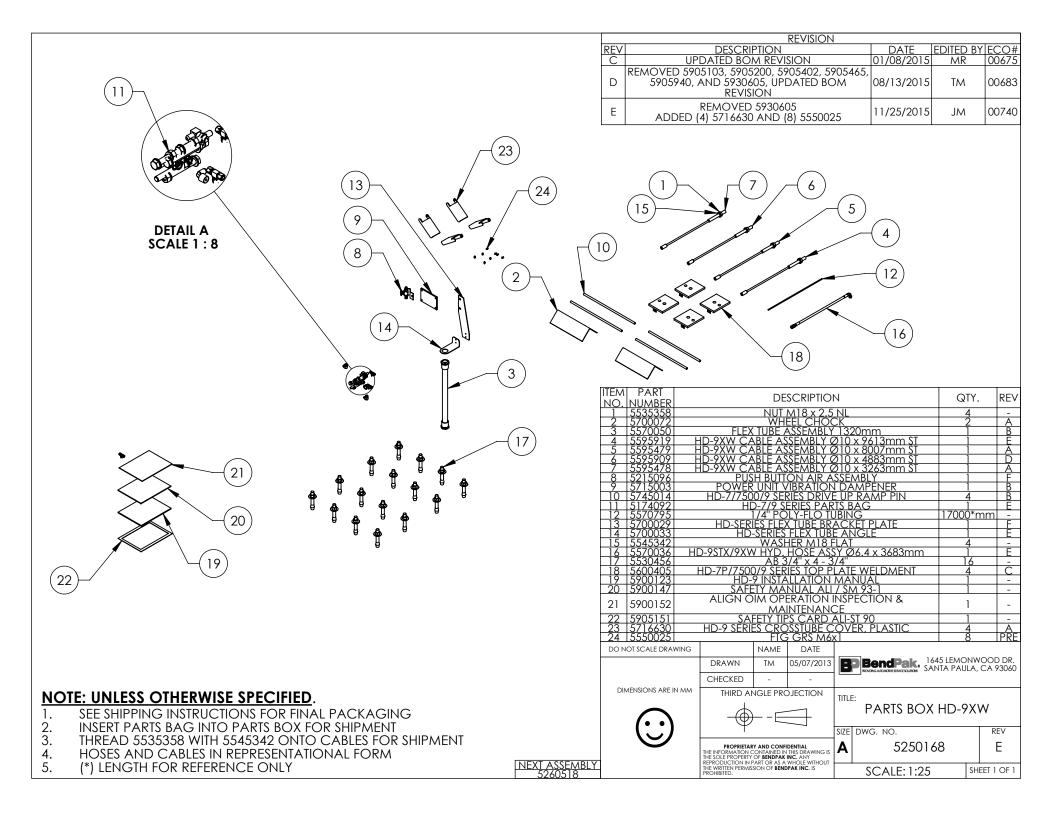

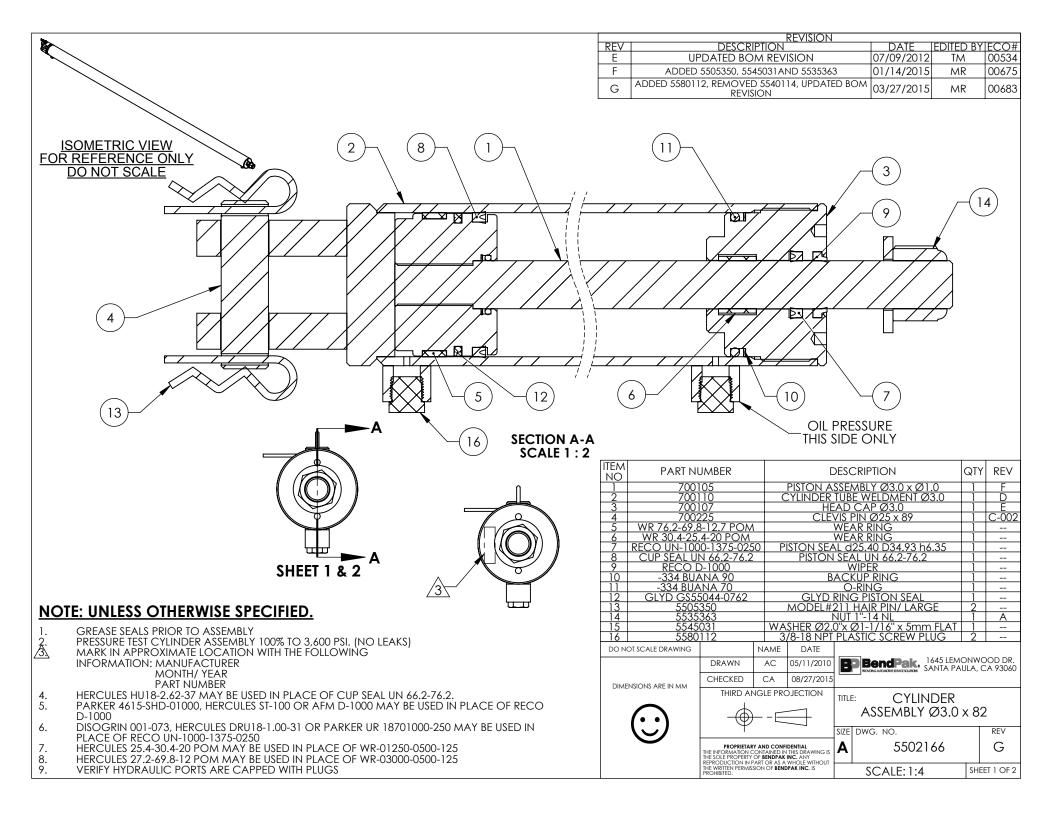

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
С	UPDATED NAME TO INCLUDE NEXT ASSEMBLY, UPDATED NEXT ASSEMBLY	12/11/2008	AC	00174
D	REMOVED 9NX FROM TITLE	02/24/2010	AC	00333
	UPDATED NEXT ASSEMBLY			
D-001	UPDATED NEXT ASSEMBLIES	11/23/2012	TM	00562
D-002	UPDATED NEXT ASSEMBLIES	05/21/2013	TM	00593
E	REPLACED 5570110 WITH 5570129	1/12/2015	MR	00675

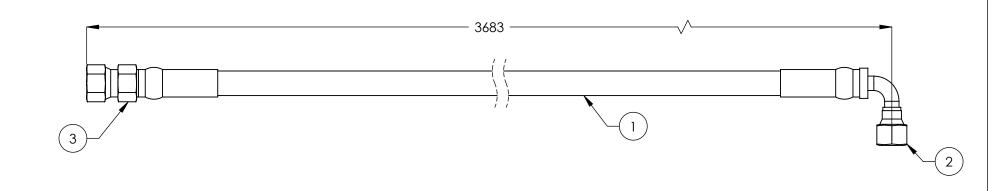


ITEM NO. PART NUMBER DESCRIPTION QTY. 1 5570129 Ø6.4 ID HYDRAULIC HOSE 3617mm*	REV
1	
1 33/012/ 20.4 ID 11 DKAOLIC 1103L 301/111111	-
2 5550345 FTG ELB Ø1/4 CRIMP x -04 JIC 1	-
3 5550325 FTG NPL Ø1/4 CRIMP x -04 JIC 1	-
DO NOT SCALE DRAWING NAME DATE	
DRAWN AC 01/18/2008 BendPak, 1645 LEMONWOOD	
DIMENSIONS ARE IN MM CHECKED VB 02/06/2015	
TOLERANCES: THIRD ANGLE PROJECTION TITLE.	_
MD-9STX/9XW HYD. HOS	ΣE
General Table ASSY Ø 6.4 x 3683mm	
	EV
5250168 SURFACE FINISH 1.6 ISO Ra µm	LV
FOR MACHINED SURFACES PROPRIETARY AND CONFIDENTIAL A 5570036 F	
THE SOLE PROPERTY OF PENDRAY INC. ANIV.	
5250189 SEPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS SCALE-1-2 SHEFT 1	OF 1
5570036 THE WRITTEN PERMISSION OF BENDPAK INC. IS SCALE: 1:2 SHEET I	Or I

NOTE: UNLESS OTHERWISE SPECIFIED.

- FOR ITEM 1 SPECIFICATIONS REFER TO PART SPECIFICATION FORM (*)ITEM 1 QTY FOR REFERENCE ONLY
- 2.

	REVISION			
REV.	DESCRIPTION	DATE	EDITED BY	ECO#
Α	PRODUCTION RELEASE	12/24/2007	AC	00104
A-001	CHANGED SURFACE FINISH FROM 3.2 µm TO	09/05/2008	GJ	00237
	1.6 Ra µm			
A-002	UPDATED NEXT ASSEMBLY	10/02/2008	AC	00140
В	UPDATE TUBE TO NEW STYLE, UPDATED NEXT	12/11/2008	AC	00256
	ASSEMBLY AND TITLE			
B-001	UPDATED NEXT ASSEMBLY	05/04/2009	AC	00277
B-013	UPDATED NEXT ASSEMBLIES	05/17/2013	TM	00593

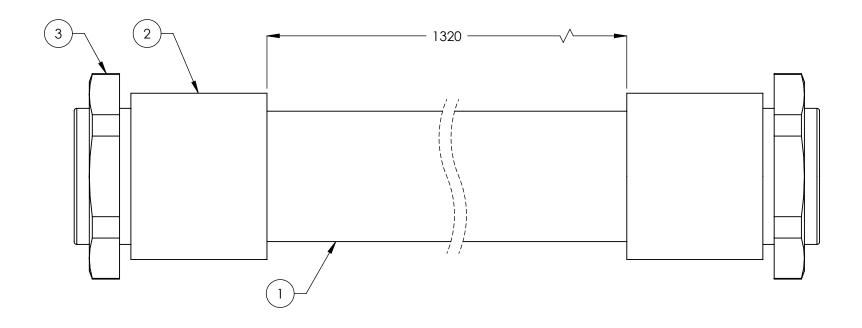

IIEM NO	PARI NUMBER	DESCRIPTION	QIY.	REV
1	5570053	PE FLEX TUBE Ø34.5xØ29	1386mm*	-
2	555555	WQG1-M36/AD34.5 CONNECTOR	2	-
3	5535050	PLASTIC NUT M36 x 2	2	-

DO NOT SCALE DRAWING		NAME	DATE	
DIMENSIONS ARE IN MM TOLERANCES:	DRAWN	AC	12/24/2007	
$0. = \pm 1.5$ $0.0 = \pm 1.0$	CHECKED			
$0.00 = \pm 0.25$ $0.000 = \pm 0.13$	1A DRIHT	NGLE PRO	DJECTION	TI
ANGULAR: MACH ±2°				
SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED	+	=		SI
MATERIAL:	· ·			31.

BPBendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

FLEX TUBE ASSEMBLY 1320mm REV

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDAYA INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED. NEXT ASSEMBLY HD/HDS/HDSO SERIES


SIZE DWG. NO. 5570050


> SCALE: 1:1 SHEET 1 OF 1


В

NOTE: UNLESS OTHERWISE SPECIFIED.

- FOR ITEM 1 SPECIFICATIONS REFER TO PART SPECIFICATION FORM
 (*)ITEM 1 QTY FOR REFERENCE ONLY

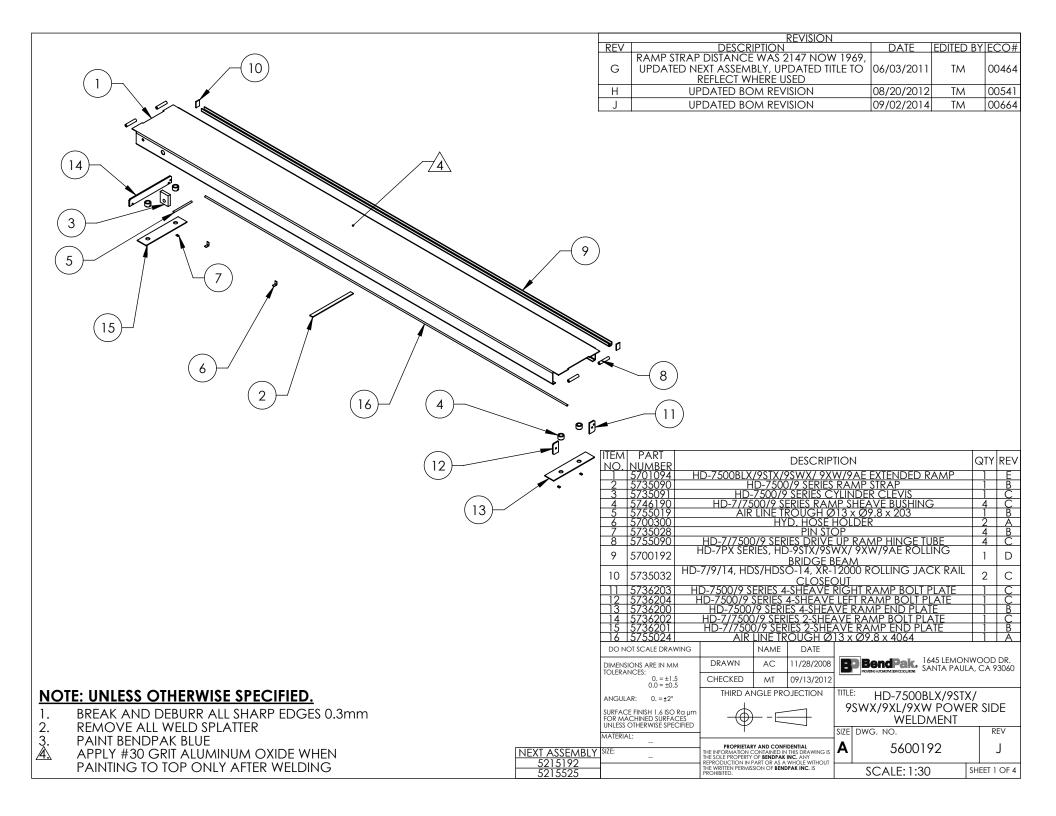

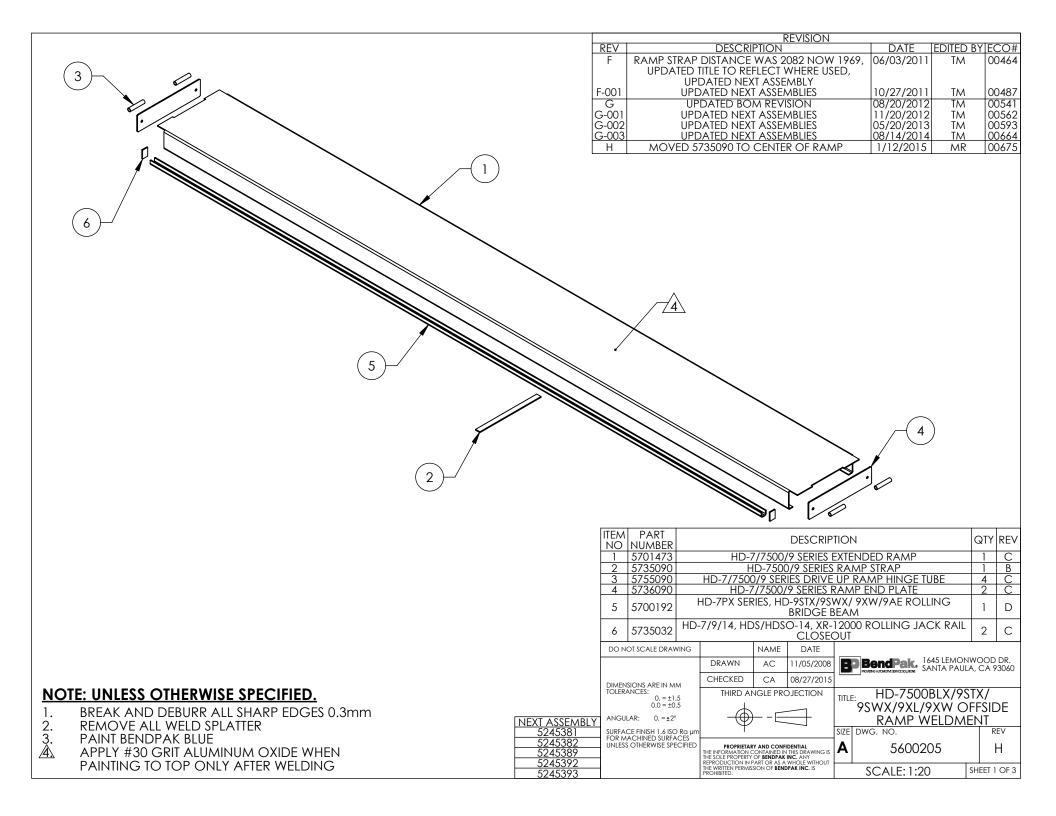

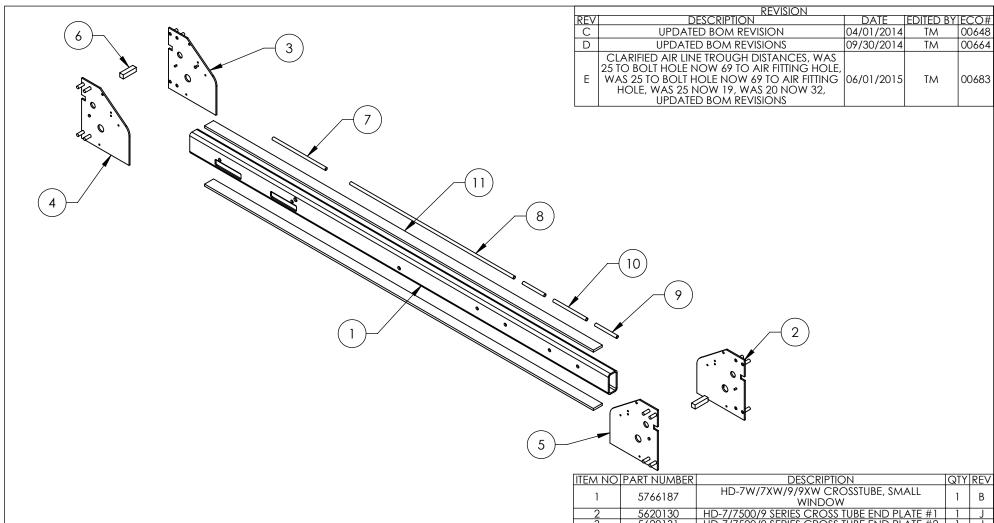

	1	5766187	HD-7W/7XW/9/9XW CROSSTUBE, SMALL WINDOW	1	В	
İ	2	5620130	HD-7/7500/9 SERIES CROSS TUBE END PLATE #1	1	J	
	3	5620131	HD-7/7500/9 SERIES CROSS TUBE END PLATE #2	1	J	
	4	5620132	HD-7/7500/9 SERIES CROSS TUBE END PLATE #3	1	J	
İ	5	5620133	HD-7/7500/9 SERIES CROSS TUBE END PLATE #4	1	J	
ĺ	6	5760010	HD-7/9 SERIES CROSSTUBE SAFETY BLOCK	2	В	
	7	5755018	AIR LINE TROUGH Ø13 x Ø9.8 x 297	1	С	
	8	5755020	AIR LINE TROUGH Ø13 x Ø9.8 x 918	1	С	
ĺ	9	5755022	AIR LINE TROUGH Ø13 x Ø9.8 x 121	2	В	
	10	5755021	AIR LINE TROUGH Ø13 x Ø9.8 x 184	1	В	
	11	5735460	HD-7W/7XW/9/9XW CROSS TUBE STRAP	2	Α	
DO NOT SCALE DRAWING			NAME DATE			

DRAWN CHECKED DIMENSIONS ARE IN MM TOLERANCES:

0. = ±1.5 0.0 = ±0.5

ANGULAR: 0. = ±2°

SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED

BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060 11/16/2012 08/26/2015

REV

Е

SHEET 1 OF 2

THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL

TM

CA

WELDMENT, SMALL WINDOW SIZE DWG. NO.


HD-9/9XW CROSSTUBE

5600714 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. AN REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED. SCALE: 1:15

NOTE: UNLESS OTHERWISE SPECIFIED.

- BREAK AND DEBURR ALL SHARP EDGES 0.3mm 2. REMOVE ALL WELD SPLATTER
- PAINT BENDPAK BLUE

NEXT ASSEMBLY 5215621

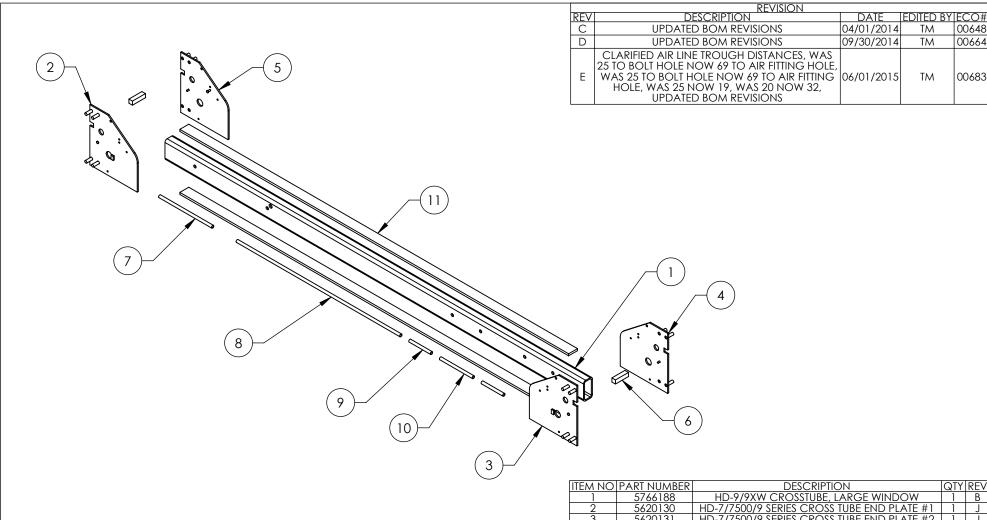

1	5766188	HD-9/9XW CROSSTUBE, LARGE WINDOW	1	В
2	5620130	HD-7/7500/9 SERIES CROSS TUBE END PLATE #1	1	J
3	5620131	HD-7/7500/9 SERIES CROSS TUBE END PLATE #2	1	J
4	5620132	HD-7/7500/9 SERIES CROSS TUBE END PLATE #3	1	J
5	5620133	HD-7/7500/9 SERIES CROSS TUBE END PLATE #4	1	J
6	5760010	HD-7/9 SERIES CROSSTUBE SAFETY BLOCK	2	В
7	5755018	AIR LINE TROUGH Ø13 x Ø9.8 x 297	1	С
8	5755020	AIR LINE TROUGH Ø13 x Ø9.8 x 918	1	С
9	5755022	AIR LINE TROUGH Ø13 x Ø9.8 x 121	2	В
10	5755021	AIR LINE TROUGH Ø13 x Ø9.8 x 184	1	В
11	5735460	HD-7W/7XW/9/9XW CROSS TUBE STRAP	2	Α
DO NOT SCALE DRAWING		NAME DATE		

DRAWN TM CHECKED CA

DIMENSIONS ARE IN MM TOLERANCES: 0. = ±1.5 0.0 = ±0.5

ANGULAR: $0. = \pm 2^{\circ}$

SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED 11/16/2012 08/26/2015

BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

SHEET 1 OF 2

QTY REV

00648

00664

00683

THIRD ANGLE PROJECTION

HD-9/9XW CROSSTUBE WELDMENT, LARGE WINDOW

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. AN REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.

REV SIZE DWG. NO. Е 5600715

SCALE: 1:15

3. PAINT BENDPAK BLUE


2.

NOTE: UNLESS OTHERWISE SPECIFIED.

REMOVE ALL WELD SPLATTER

BREAK AND DEBURR ALL SHARP EDGES 0.3mm

NEXT ASSEMBLY 5215622

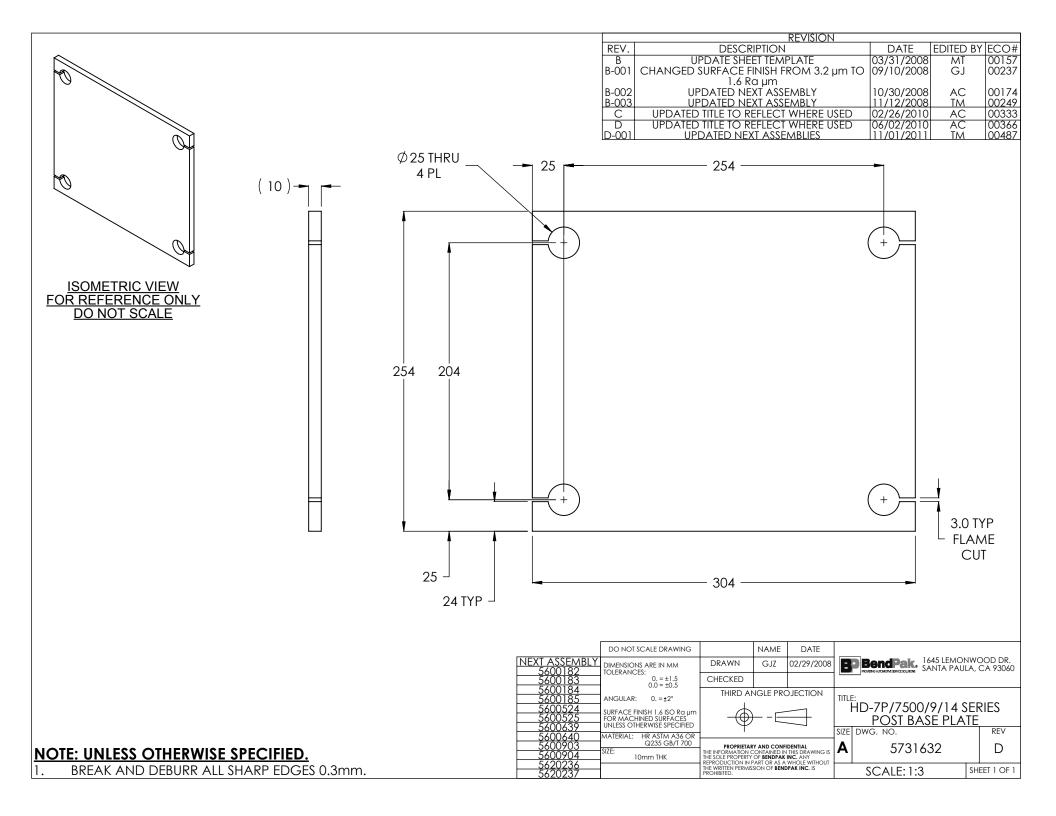



BENDPAK Number:	5900123
MRP Description:	HD-9 INSTALLATION MANUAL
Date:	05/12/2016
ECO:	00741

1. Engineering Specification

Application:

INSTALLATION MANUAL

Detailed Description:



Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			




BENDPAK Number:	5900147
MRP Description:	SAFETY MANUAL ALI / SM 93-1
Date:	12/28/2010
ECO:	00431

1. Engineering Specification

Application:

ALI SAFETY MANUAL

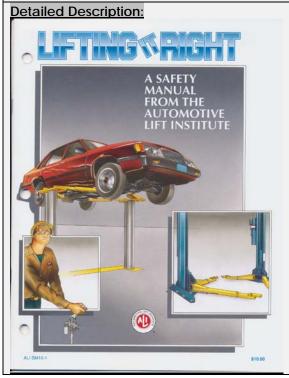

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			




BENDPAK Number:	5900152
MRP Description:	ALIGN OIM OPERATION INSPECTION & MAINTENANCE
Date:	12/28/2010
ECO:	00431

1. Engineering Specification

Application:

ALI OPERATION INSPECTION & MAINTENANCE MANUAL

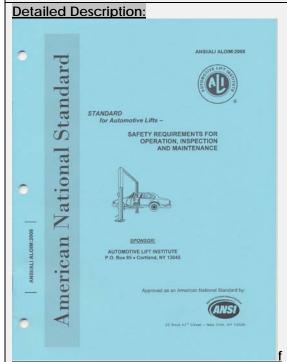

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905103
MRP Description:	WARNING ALI/WL 200
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

ALI 4 POST SAFETY STICKER KIT

Detailed Description:



SIZE: 11" L x 8.5" W (279mm x 216mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905151
MRP Description:	SAFETY TIPS CARD ALI-ST 90
Date:	12/28/2010
ECO:	00431

Application: ALI SAFETY TIPS Detailed Description: Automotive Lift SAFETY TIPS First free short with you when the you did as constant entered to your fit created. It inspects plays when the your did as the state of the your fit created. It inspects plays when the your did as the state of the your fit to your fit created. It inspects plays make the your did not be fitted with originative resound. It inspects plays make the your fit to you fit makes the resound Court black parts It inspects plays make the your fit to you fit makes the resound Court black parts It inspects plays make the your fit to you fit makes the resound Court black parts It inspects plays make the your fit to you fit to the short with originative resound. It inspects plays make the districtions present you found to the state with originative plays the man nature. It is allowed to the plays the plays the your fit to the short with the plays the plays the your fit to the plays the your fit to the plays the your fit to the plays the your fit to the plays the your fit to the plays the your fit to the your fit

2. Vendor Information Approved Vendor Vendor Part # Contact # Preferred Vendor 1)



BENDPAK Number:	5905311
MRP Description:	BENDPAK LABEL; 4 x 38" WHITE INK
Date:	05/13/2015
ECO:	00689

1. Engineering Specification

Application:

BENDPAK LABEL


Detailed Description:



SIZE: 38" L x 4.25" W (965mm x 108mm)

- Material: Yellow Represents Clear Adhesive PET
- Size: 4.25"W x 38"H
- Thickness: 4 Mil
- Finish: Polished
- Ink: U.V. protected, Opaque White
- Print Process: Silk Screen, 85 line-screen (Opaque White ink, clear adhesive PET will fill in blank areas.)
- Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection


Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

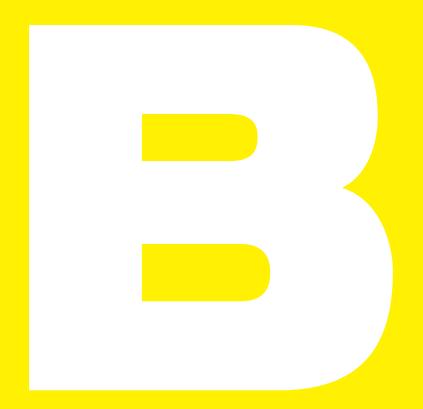







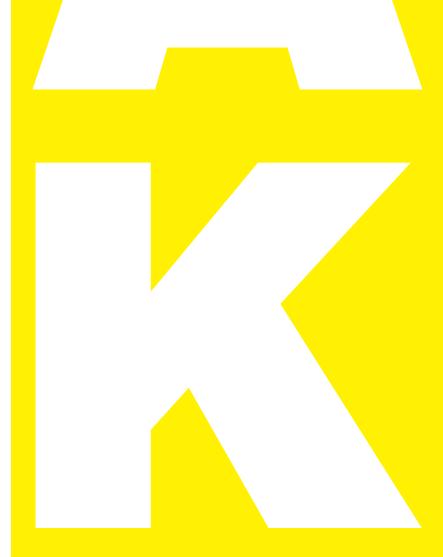



ABOVE-GROUND LIFTS





1645 Lemonwood Drive Santa Paula, CA 93060 U.S.A. (805) 933-9970 www.bendpak.com



BENDPAK Number:	5905402
MRP Description:	MAX CAP DANGER 9K
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

LIFT CAPACITY STICKER

Detailed Description:



THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 9000 lbs. / 4082 kg

Max. Lifting Cap. / Front of Lift Center 4500 lbs. / 2041 kg

Max. Lifting Cap. / Rear of Lift Center 4500 lbs. / 2041 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.

<u>SIZE:</u> 5" L x 4" W (127mm x 100mm)

P/N 5905402

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

ADANGER

THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 9000 lbs. / 4082 kg

Max. Lifting Cap. / Front of Lift Center 4500 lbs. / 2041 kg

Max. Lifting Cap. / Rear of Lift Center 4500 lbs. / 2041 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.



BENDPAK Number:	5905465
MRP Description:	MANUFACTURER LABEL
Date:	05/07/2013
ECO:	00593

1. Engineering Specification

Application:

MANUFACTURER LABEL

Detailed Description:

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY
POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS
WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER
UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE
MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER
AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS
RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:
BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE
CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE
RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC
ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR
CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR
INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832
THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA

SIZE: 5.125" L x 5.125" W (130mm x 130mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT

CAPACITY: MED/HVY DTY

POWER: ELECTRIC/HYDRAULIC

ANCHORS: AS EQUIPPED

INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS

WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 — 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA



BENDPAK Number:	5905556
MRP Description:	4-POST SAFETY DECAL
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

4-POST SAFETY DECAL

Detailed Description:



SIZE: 23" L x 4" W (584m x 100mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

DMMC



SAFETY LOCKS ARE ENGAGED BEFORE **ENTERING WORK AREA.** Suspension components used on this lift are intended

to raise and lower lift only and are NOT meant to be load-holding devises. Remain clear of elevated lift unless visual confirmation is made that all primary safety locks are fully engaged and the lift is LOWERED onto the safety locks. Refer to installation/operation manual for proper safety lock procedures and/or further instruction.

WIRE ROPE INSPECTION AND MAINTENANCE

Lifting cables should be replaced every (3) three years or when visible signs of damage are apparent. DO NOT USE LIFT WITH DEFECTIVE OR WORN CABLES.

- Wire rope should be maintained in a well-lubricated condition at all times. Wire rope is only fully protected when each wire strand is lubricated both internal and external.
- Excessive wear will shorten the life of the wire rope. The factory suggests wire rope lubricant that penetrates to the core of the rope and provides long-term lubrication between each individual strand. In order to make sure that the inner layers of the rope remain well lubricated, lubrication should be carried out at intervals not exceeding three (3) months during operation. All sheaves and guide rollers in contact with the moving wire rope should be given regular visual checks for surface wear and lubricated to make sure that they run freely. This operation should be carried out at appropriate intervals
- generally not exceeding three (3) months during operation. For all sheave axles, the factory recommends standard wheel bearing grease. For all sheaves and/or guide rollers, the factory recommends 90-WT gear oil or similar heavy lubricant applied by any method including pump/spray dispensing, brush, hand and/or swabbing. Failure to read, understand and follow these instructions may cause death or serious injury. Read

before using lift. IMPORTANT **OPERATION / MAINTENANCE**

INSTRUCTIONS - PLEASE READ

TO RAISE LIFT

✓ Set parking brake or use wheel chock to hold vehicle in position. Before raising vehicle, be sure all personnel are clear of lift and surrounding area. Pay careful attention to overhead clearances. Raise lift to desired height by pressing push button on power unit. Maintain visual contact with vehicle and surrounding area at all

and understand these instructions

STOP IMMEDIATELY if load shifts or becomes unlevel. After vehicle is raised to desired height, lower lift onto the nearest

safety lock. Do not allow cables to become excessively slack. ALWAYS INSURE ALL PRIMARY SAFETY LOCKS ARE ENGAGED

Press push button AIR SAFETY VALVE and HOLD.

times while lowering lift.

before entering work area.

descended completely.

and objects are kept clear.

engage simultaneously.

proper mounting.

Position vehicle tires at the center of each runway.

Before lowering vehicle, be sure all personnel, tools and equipment are clear of lift and surrounding area. Raise lift by pressing RAISE BUTTON on power unit. Elevate lift at least two inches to allow adequate clearance for locks to clear.

TO LOWER LIFT

Lower vehicle by pressing power unit lowering handle until lift has

When lowering lift PAY CAREFUL ATTENTION that all personnel

ALWAYS keep a visual line of site on lift AT ALL TIMES. ALWAYS make sure that ALL LOCKS are disengaged. If one of the locks inadvertently engages on descent, lift and/or vehicle may

disrupt causing personal injury or death.

REQUIRED MONTHLY MAINTENANCE ALWAYS consult operation manual for factory recommended maintenance. Adjust lift cables to ensure lift raises level and safety locks

Check all chain/cable connections, bolts and pins to insure

- Visually inspect safety locks for proper operation. Visually inspect concrete floor. DO NOT USE LIFT if concrete foundation shows signs of deterioration.
- Inspect all anchor bolts and retighten if necessary. Check columns for squareness and plumb. Inspect all bolts and/or fasteners making sure they are
- properly secured. Make a visual inspection of ALL MOVING PARTS and check for
- excessive signs of wear. Replace ALL FAULTY PARTS before lift is put back into operation.
- 1. WARNING: If cement anchor bolts are loose, or any component of the lift is found to be defective, DO NOT USE LIFT! 2. Never operate the lift with any person or equipment below.
- 3. Never exceed rated capacity.
- 4. Always insure safety locks are engaged before any attempt is made to work on or near vehicle.
- 5. Never leave lift in an elevated position unless the safety locks are engaged. 6. Do not permit electric motor to get wet! Motor damage caused

by dampness is not covered under warranty.

P/N 5905556



BENDPAK Number:	5905940
MRP Description:	PRODUCT DATA LABEL
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

PRODUCT DATA LABEL

Detailed Description:



SANTA PAULA, CA USA WWW.BENDPAK.COM

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS POWER: ELECTRIC/HYDRAULIC INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT OPERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID. CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS.

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM 6488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC). AND/OR INTERNATIONAL BUILDING CODE (IBC).

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

DO NOT REMOVE ENGINEERED BY BENDPAK INC. USA

MADE IN CHINA

SIZE: 2.3" L x 4.5" W (58mm x 114mm)

	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



SANTA PAULA, CA USA WWW.BENDPAK.COM PN 5905940

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS

POWER: ELECTRIC/HYDRAULIC

INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT OF PERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT AND, IF THEY ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID. CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS.

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (BC).

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

DO NOT REMOVE

ENGINEERED BY BENDPAK INC. USA

MADE IN CHINA



BENDPAK Number:	5905953
MRP Description:	LABEL D (4-POST LIFTS CE)
Date:	12/04/2015
ECO:	00724

1. Engineering Specification **Application:** DATA SERIAL TAG, 4-POST LIFTS, CE **Detailed Description:** Santa Paula, CA USA www.bendpak.com BP BendPak SIZE: 3.38" L x 3.38" W MODEL NUMBER SERIAL NUMBER (85.7mm x 85.7mm) LIFT CAPACITY DATE OF MFG. ROLLING JACK MAX CAP. MAX PSI / BAR VOLTAGE 110-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph 208-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph DANGER! Disconnect Power Before Servicing (€ ∰ [H] PN 5905953

2. Vendor Information (Or for Reference)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor	
1)				
2)				
OR BENDPAK ENGINEERING APPROVED EQUIVALENT				



Santa Paula, CA USA www.bendpak.com

MODEL NUMBER

SERIAL NUMBER

ROLLING JACK MAX CAP.

LIFT CAPACITY

MAX PSI / BAR

DESCRIPTION

VOLTAGE

- 110-240VAC, 50-60 Hz, 1 Ph 208-240VAC, 50-60 Hz, 1 Ph
- 380-415VAC, 50-60 Hz, 3 Ph
- 208-440VAC, 50-60 Hz, 3 Ph

DATE OF MFG.



WARRANTY VOID IF DATA PLATE IS REMOVED





PN 5905953



2016 CE-Approved 4 Post Lifts Colors & Graphics

4/7/16

CONFIDENTIAL INFORMATION.

You may not disclose, print, copy or disseminate this information.

Unauthorized use is a violation of federal criminal law.

4 Post Lifts Product Decal Positioning







C



Ali_4_Post_labels.pdf: (Order Labels from ALI)

Total of 4

PN 5905311

${\bf BPK\ Post\ Branding\ Decal\text{-}Large_5905311.pdf:}$

Material: Clear Adhesive PET Size: 4.25"W x 38"H Thickness: 4 Mil

Finish: Polished

Ink: U.V. protected, Opaque White

Print Process: Silk Screen, 85 line-screen (Yellow color in file represents what should be clear PET material and SHOULD NOT print as Yellow ink. White area in file represents Opaque White ink.)

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

4_Post_Safety_Decal.pdf:

Size: 4"W x 23"H

Material: White Vinyl Pressure Sensitive Adhesive

PN 5905556

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen


or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion,

chemical, and ultra violet protection

4 Post Lifts Product Decal Positioning





P/N 5905401 - Max Cap. Danger 7k P/N 5905695 - Max. Cap. Danger 7500 P/N 5905402 - Max Cap. Danger 9k P/N 5905557 - Max. Cap. Danger 14K P/N 5905406 - Max Cap. Danger 18k P/N 5905407 - Max. Cap. Danger 27K P/N 5905408 - Max. Cap. Danger 35K P/N 5905409 - Max. Cap. Danger 40K *Max. Cap. Danger.pdf:

Size: 4"W x 5"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

MAXIMUM LIFTING CAPACITY Lbs. Kg.

P/N 5905645 - NRTL_Lifting_Cap_Label_7K
P/N 5905700 - NRTL_Lifting_Cap_Label_7500
P/N 5905650 - NRTL_Lifting_Cap_Label_9k
P/N 5905665 - NRTL_Lifting_Cap_Label_14k
P/N 5905675 - NRTL_Lifting_Cap_Label_18k
P/N 5905680 - NRTL_Lifting_Cap_Label_27k
P/N 5905685 - NRTL_Lifting_Cap_Label_35K
P/N 5905690 - NRTL_Lifting_Cap_Label_40K

*NRTL_Lifting_Cap_Label_.pdf:

Size: 4.5"W x 3.25"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

*DEPENDS ON LIFT MODEL AND CAPACITY



PN 5905940

Product_Data_Label_5905940-New.pdf:

Size: 4.5"W x 2.3"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen

or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection



PN 5905953

2015_Serial_Tag-D-5905953.jpg:

Size: 3"W x 3"H

Material: Material: 2 Mil. Matte Silver Polyester


(Flex-PSE)

Print using thermal transfer printer with resin ribbon


Ink: 1 Color-Black



4 Post Lifts Product Decal Positioning

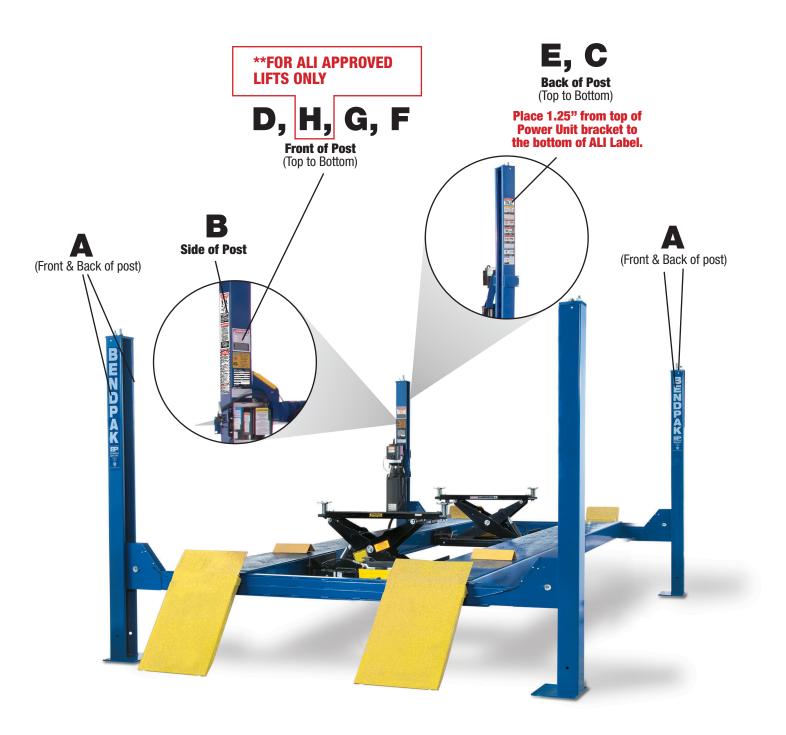

4 Post Lifts Packaging

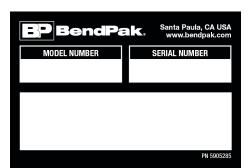

Serial Tag New-2015 Peel Off-5905285.jpg:

Size: 3"W x 3"H

Material: 2 Mil. Matte Silver Polyester (Flex-PSE) Print using thermal transfer printer with resin ribbon Ink: 1 Color-Black

PEEL OFF INVENTORY LABEL

SERIAL NUMBER

Do not remove back sheet of this portion to prevent from sticking completely as shown in image.





MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY
POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED
INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS
WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER
UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE
MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER
AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS
RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:
BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE
CRITERIA AS PRESCRIBED BY ASTM E488 — 96(2003). LIFT BUYERS ARE
RESPONSIBLE FOR ANY SECULA REGIONAL STRUCTURAL AND/OR SEISMIC
ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR
CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR
INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832
THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA

Manufacturer Packaging Label:

Size: 5"W x 5"H

Material: White adhesive paper Ink: U.V. protected CMYK 2/C Process

Print Process: Offset Lithography - 200 line-screen or 300

p.p.i. for digital